

VS-900
Vital Signs Monitor

Technical Specifications

Safety Weight	Meets the requirements of IEC60601 series. < 2.5kg(including Recorder and battery)	Resolution Alarm Pulse Rate Range Accuracy	1mmHg Systolic, Diastolic, Mean, Pulse Rate 40~240 bpm ±3bpm or ±3%, whichever is greater
Operation Environment			
Temperature	0℃~+40℃(without Temp module), 5℃~+40℃ (with Temp module)	Mindray SpO₂ Measurement range Resolution Accuracy	0 ~ 100% 1% Adult/Pediatric: ±2% (70~100%); Neonatal: ±3% (70~100%); 0~69% unspecified
Humidity	15%~95 %, non-condensing	PI range	0.05~20 %
Barometric	427.5~805.5mmHg (57.0kPa~107.4kPa)	Pulse rate Resolution Accuracy	Range: 20~254bpm 1bpm ±3bpm(Without motion), ±5bpm(With motion)
Patient Type Adult, Pediatric, Neonatal			
Performance Specifications			
Display	Dimension: 8.4" Resolution: 800×600	Nellcor SpO₂ Measurement range Resolution Accuracy	0~100% 1% 70%~100%: Adult/pediatric±2%, Neonate±3% 0%~69%, unspecified
Waveform	1 Plethysmogram waveform	Pulse rate	Range: 20~300bpm
Indicators	Alarm indicator Power indicator Battery indicator	Accuracy	20~250 bpm: ± 3 bpm 251~300 bpm: not specified
Interface	Network port 2 USB port Multifunctional port	SmarTemp™ Thermometer Monitoring mode	
Trend	Up to 5,000 measurements	Measurement range	25℃~44℃(77℉)~111.2℉)
Alarm	3-level audible and visual alarm	Accuracy	±0.2℃(±0.4℉),25~32℃(77~89.6℉), excluding 32℃(89.6℉); ±0.1℃(±0.2℉),32~44℃(89.6~111.2℉), including 32℃(89.6℉).
Network	Connecting to central monitoring system, and via eGateway to CIS/HIS/EMR/ADT	Predictive mode	
Recorder	Build-in thermal array recorder Paper speed: 25mm/s	Measurement range	35℃~43℃ (95℉~109.4℉)
Li-ion battery	Rechargeable Working time up to 8 hours(high capacity battery)/ 4 hours(low capacity battery)	Typical measuring time	<12s at ambient temperature 25~28℃ without motion
NIBP			
Operation modes	Manual/Automatic/STAT/Customized		
Measurement unit	mmHg/kPa selectable		
Measurement types	Systolic, Diastolic, Mean, Pulse Rate		
Measuring accuracy	Max mean error: ±5 mmHg Max standard deviation: 8 mmHg		
Measurement range	Adult: 10~270mmHg Pediatric: 10~200mmHg Neonate: 10~135mmHg		
Over-pressure protection	Double protection by hardware and software		



VS-900
Vital Signs Monitor

Your trusted companion to
help streamline primary care
patient monitoring




Intuitive and Easy to Operate

- 8.4" LED back-light LCD display provides a clear and distinct view.
- The optional touch screen with intuitive interface along with the rotary knob and button provide excellent usability.
- Optional barcode scanner allows quick patient admit and patient ID input. The patient information input procedure can be further simplified by accessing the full patient demographic automatically from the ADT server.



Convenient Clinical Monitoring

- Manual, automatic and customized NIBP monitoring modes are perfectly suited for different clinical applications.
- PI (perfusion Index) of SpO2 measurement can guide caregivers to find the best measurement position. It is also a valuable indicator for the changing health condition of neonatal patients.
- Spot check and continuous monitoring without adjusting monitoring modes dramatically simplifies the monitoring of a diverse patient population. The convenient patient data review, record and output by patient or by time further ease the caregiver's daily workload.

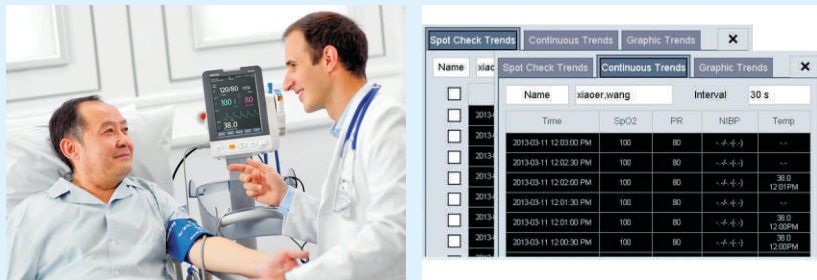

Quick
Demographic
Input



Convenient
Patient
Check




Patient
Clinical Data
Records



Clinical Decision
and
ER Triage
Support

Powerful Patient Data Management

- Stores up to 5,000 patient measurements

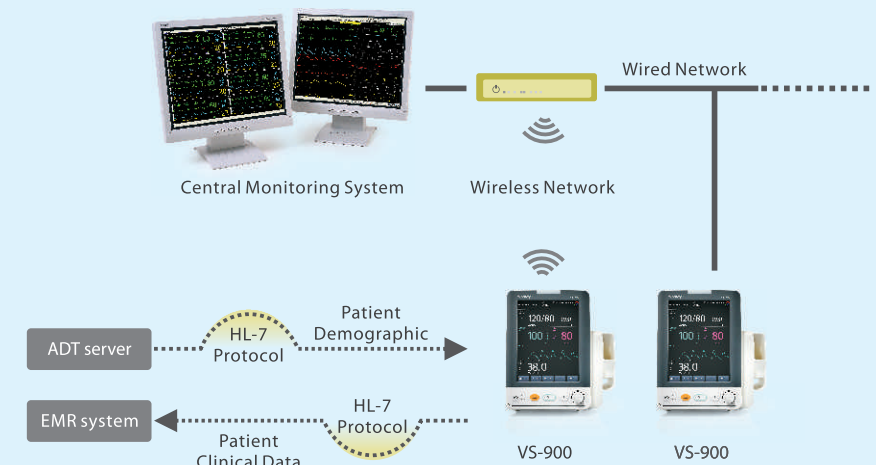

VS-900 can be easily connected to the EMR (Electronic Medical Records) system via Mindray's powerful eGateway, both through WiFi or wired connections. This solution will dramatically simplify the workflow by automating the clinical data collection and ADT procedures, as well as making data review and reporting more convenient during the patient's entire stay.

Professional Tool for Clinical Decision Support

- The optional MEWS (Modified Early Warning Score) system offers effective support for clinical decision making and patient triage. Based on PR, RESP, NIBP, Temp and AVPU (alert, voice, pain, unresponsive), the system provides convenient clinical scoring for different severity levels of a patient's condition.

MEWS Scoring		
PR	80	0
RESP	98	3
NIBP(mmHg)	166 / 100	0
Temp(°C)	38.0	0
AVPU	Unresponsive	3
Calculate		
MEWS		
6		
Clear		
MEWS Protocol >>		
Record		
Review		